



Tech Info Library

AppleTalk: Effects of Redundancy on Some Network Configurations

Revised: 11/11/92
Security: Everyone

AppleTalk: Effects of Redundancy on Some Network Configurations

=====

Article Created: 29 September 1992

TOPIC -----

We have a cisco router which provides redundant paths to several AppleTalk networks. The internet routers now flip-flop between the two AGSs as their next router. Is what we're doing a legal network configuration? If it is, what causes the internet routers to swap between what they see as their next router?

Given our number of AT devices, number of physical networks, and zones (312), we're extremely sensitive to traffic issues. I would like to know more about increased traffic due to redundancy and how split horizon may help.

Also, from a desktop view, once a process is initiated from a Macintosh computer to some service on a remote network, do all packets follow the same path until the connection is broken? In other words, if I connect to a server on a remote network, and the packet can be forwarded by either CISCO 3 or CISCO 6, will all packets be forwarded through the same CISCO for the duration of the process? Is there a difference if the connection is to a server versus a printer or a Macintosh, and so on?

DISCUSSION -----

Configuration

The network configuration you've created is perfectly legal and the behavior you see is correct. RTMP assumes the latest route to a specific network is the most recent information, and replaces the information currently in the routing table, even if the route "cost" (hop count) is equal.


DDP "Best Router" Functionality

"Best route" reduces the number of needless routers used when a DDP session

to either router A or router B, whichever broadcast its routing table last.

- 2) Either of the routers are capable of delivering the packet to network 2, but let's say router B was chosen. Router B passes the NBP packet on to network 2 where the AFP server picks it up and responds directly to the end node.
- 3) If the AFP server last saw an RTMP packet from router A, then router A would be the choice to get the packet to network 1. Since router A has connectivity to network 1, it passes it along and the end node (Mac-A) picks it up.
- 4) When the end node picks it up, it sees that the last router that was used was router A, and it then caches router A as the "best route" for the connection to the AFP server. The AFP server could just have easily last heard from router B, which would cause router B to be chosen as the "best route".

In a 3rd scenario, let's separate the redundant path by yet another router.

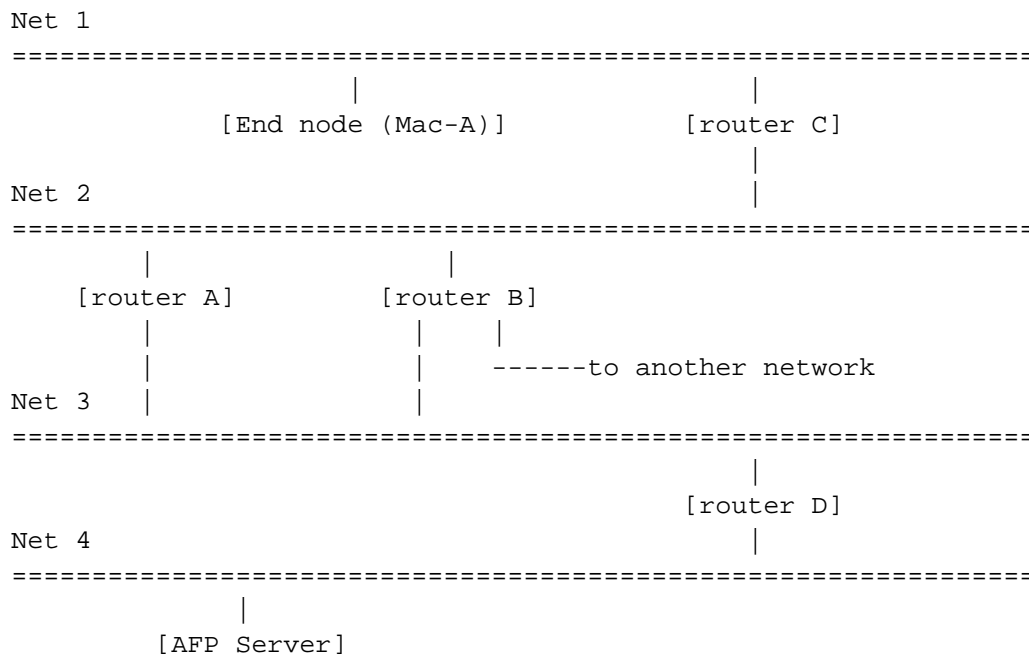

This actually looks more like what you've installed. In this scenario, DDP "best route" does nothing to allow better use of the redundant path. Let's look at the example:

- 1) If the end node (Mac-A) wants to talk to the AFP server on network 4, it performs an NBP lookUp.
- 2) The lookUp is sent to router C, and router C uses either router A or router B to deliver the packet to router D and network 4.
- 3) Router C uses the router that has a valid path and was the last one

heard from on network 2, either A or B. This is because the RTMP tables on router C are constantly changing state for the entry to network 4, and since both are offering the same cost, the newest entry is used.

- 4) The packet eventually gets to network 4, and the AFP server responds to the end node.
- 5) The end node will cache router C as the "best route" because it was the last router to touch the packet.

Nothing in the DDP "best route" caching mechanism does anything to load balance the link or to use one router over the other.

Increased NBP and RTMP Traffic and RTMP Packet Size

Increased NBP and RTMP traffic and large RTMP packets usually don't cause problems unless your network is already heavily loaded.


Increased NBP traffic can be attributed to additional devices on the cable. When anyone does an NBP lookUp for those particular types of devices, you'll have increased NBP traffic.

Your RTMP tables will be the same size; there are no additional routes to advertise, so the size of the table won't increase. Please note that on the cables where redundant routers are connected, the number of RTMP packets will double as both routers will be sending RTMP packets. In an internet where redundant routers are present, the split horizon mechanism does nothing to reduce the size of the RTMP tables over the size reduction already realized.

Problem with Redundant AppleTalk Routers

There is at least one small problem with redundant AppleTalk routers, and there may be others. Large enterprise networks have routes that sometimes flap. A route that flaps is stable (marked as good), then unstable (marked as suspect), then stable, then unstable (you get the idea). This is a common occurrence in large AppleTalk environments. You should ultimately find the cause of the flapping route and fix it, but sometimes it's caused by nothing more than a router that was momentarily overloaded.



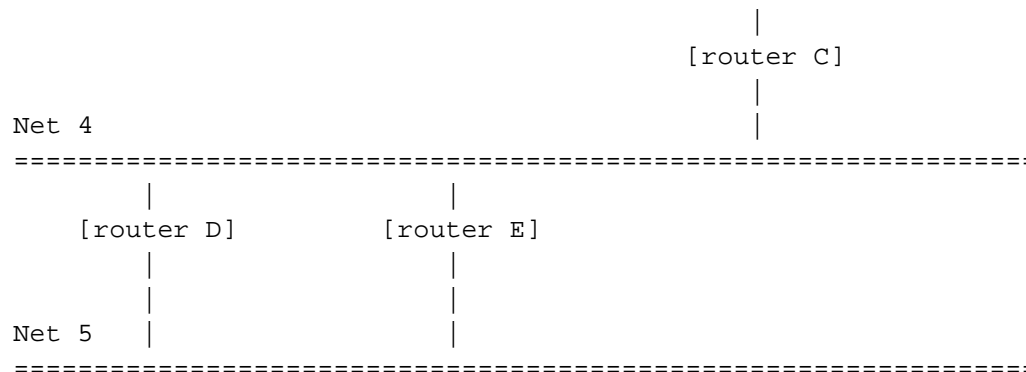

Here's what happens in a situation with redundant routers. Let's say router A gets overloaded and isn't able to get its RTMP packets broadcast as often as needed to sustain the valid routes throughout the internet. Router B is the first router to discover this, and marks the route as bad. Router B then tells router C, and router C then tells router D and router E.

Router D gets the message that the route is bad. Router E does the same thing, but at the same time router E was in the process of sending out an RTMP packet to network 5. This RTMP packet says that router E has a valid route to network 1, and updates its tables accordingly. Router D then advertises that on network number 4, and the message is propagated through the network. This problem will only manifest itself for about 60 seconds, since router E will eventually time out the entry and cause the whole chain to break down. But it does create a "black hole" for 60 seconds and can cause problems for end users in the intervening time. If you have a rock solid network, you'll never see this problem. It's common for large AppleTalk networks to occasionally suffer from flapping routes. You can even see this type of anomaly under normal conditions when a router is taken down for maintenance purposes.

This may seem to be a trivial problem, but it caused our network here at Apple considerable grief when we experienced this phenomenon. After going through this experience, we hesitate to recommend redundant routers in a large AppleTalk network. Redundant AppleTalk routers are less useful than redundant links for protocols such as TCP/IP that have routing protocols to deal with redundancy. They are perfectly legal, but may not be very useful.

Conclusion

Redundant routers may be an excellent way to provide reliable service to critical parts of the network, and may work great if your network is rock solid, but as it stands today we recommend that you leave one of them turned off until it's actually needed.

Copyright 1992, Apple Computer, Inc.

Tech Info Library Article Number:10724