



Tech Info Library

Apple III: Cables for Various Printers (3 of 4)

Revised: 7/1/85
Security: Everyone

Apple III: Cables for Various Printers (3 of 4)


=====

Apple III Drivers Aid Cable "F"

Device Manufacturer and Model:
Okidata 84

Pin-to-Pin Connections:

Apple III (Male) Okidata (usually Female)

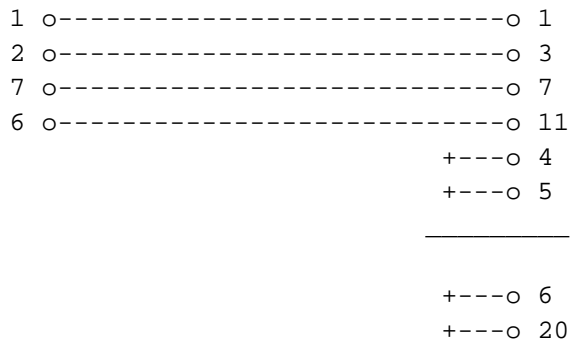

Wiring Comments:

Tie device pins
4 + 5 together; they do
not connect to the Apple III

Tie device pins
6 + 20 together; they do
not connect to the Apple III

Do NOT tie all four:
4, 5, 6 + 20 together!

Note: For proper operation when using the Apple III Super Serial Card (Apple P/N A2B0044) in an Apple III make sure that switch SW 2-6 (on the card) is in the "ON" position and that the jumper block (also on the card) is in the

"TERMINAL" Position.

Apple III Drivers Aid Cable "G"

Device Manufacturer and Model:

Heathkit H-14

Pin-to-Pin Connections:

Apple III (Male) Heatkit (usually Female)

```

1 o-----o 1
2 o-----o 3
6 o-----o 4
7 o-----o 7

```

Note: For proper operation when using the Apple III Super Serial Card (Apple P/N A2B0044) in an Apple III make sure that switch SW 2-6 (on the card) is in the "ON" position and that the jumper block (also on the card) is in the "TERMINAL" Position.

Apple III Drivers Aid Cable "H"

Device Manufacturer and Model:

Epson MX-70

Epson MX-80

Pin-to-Pin Connections:

Apple III (Male) Epson (usually Female)

```

1 o-----o 1
2 o-----o 3
6 o-----o 11
7 o-----o 7

```

Notes:

Set at 9600 Baud

Note: For proper operation when using the Apple III Super Serial Card (Apple P/N A2B0044) in an Apple III make sure that switch SW 2-6 (on the card) is in the "ON" position and that the jumper block (also on the card) is in the "TERMINAL" Position.

Apple III Drivers Aid Cable "I"

Device Manufacturer and Model:

Anadex DP-9500

Anadex DP-9501

Pin-to-Pin Connections:

Apple III (Male)

Anadex (usually Female)

```

1 o-----o 1
2 o-----o 3
6 o-----o 19
7 o-----o 7

```

Notes:

Check parity, baud, stop bits, etc.

Note: For proper operation when using the Apple III Super Serial Card (Apple P/N A2B0044) in an Apple III make sure that switch SW 2-6 (on the card) is in the "ON" position and that the jumper block (also on the card) is in the "TERMINAL" Position.

Apple III Drivers Aid Cable "J"

Device Manufacturer and Model:

- NEC 5510
- NEC 5515
- NEC 5520
- NEC 5525

Pin-to-Pin Connections

Apple III (Male)

NEC (usually Female)

```

1 o-----o 1
2 o-----o 3
4 o-----o 5
6 o-----o 19
7 o-----o 7
20 o-----+----o 6
                +----o 8

```

Wiring Comments:

Tie device pins
6 + 8 together

Note: For proper operation when using the Apple III Super Serial Card (Apple P/N A2B0044) in an Apple III make sure that switch SW 2-6 (on the card) is in the "ON" position and that the jumper block (also on the card) is in the "TERMINAL" Position. Apple III Drivers Aid Cable "K" description on next record.

Apple Technical Communications

Tech Info Library Article Number:294